

# CRANSTON

MACHINERY CO. INC.

## Model 26A081 5 M.T. S.W.L. WEB-LATCH

***Reduce labor and time  
with pneumatic release.***

***Unique design enhances  
use with flat webbing slings.***

The Cranston *WEB-LATCH* is proven in the shipping industry for use with flat webbing slings up to 4 5/16" (110mm) wide, wire rope slings, flat strap, rope, multiple strand wire, steel rings, pins or eyes.

The Cranston *WEB-LATCH* is manually attached to the load and can be either remotely or manually unlocked. Remote unlocking is accomplished by delivery of a small amount of compressed air or gas to the *WEB-LATCH* internal pneumatic system. Manual unlocking is accomplished with operator activation of the release lever housed within the *WEB-LATCH* body.



By supporting the counter balanced load pin at both ends, the Cranston *WEB-LATCH* provides an extraordinary strength to weight ratio.


A Viewing hole allows visual inspection of the latch condition from either side of the Cranston *WEB-LATCH*

## ***Features***

- *Large radius pin for superior web support.*
- *Large throat opens wide for easy loading and release.*
- *Simple to operate and maintain.*
- *Visible inspection of latch condition.*
- *Remote or Manual unlocking.*
- *Factory load tested and certified.*
- *Anti-corrosion finish.*

# ***WEB-LATCH***

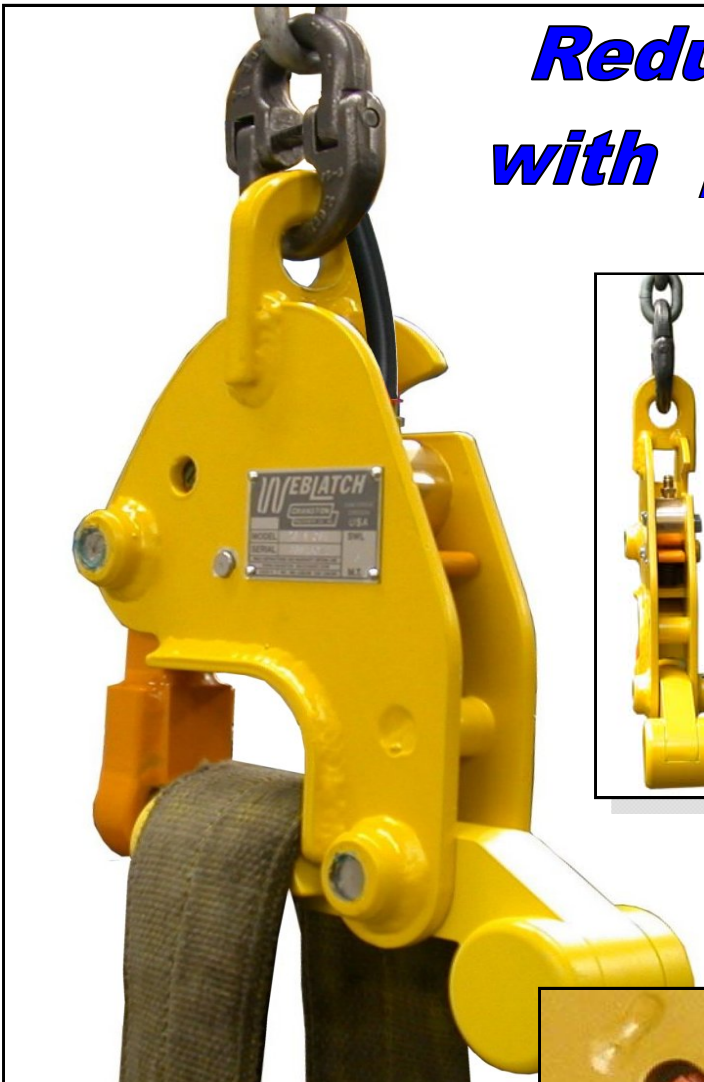

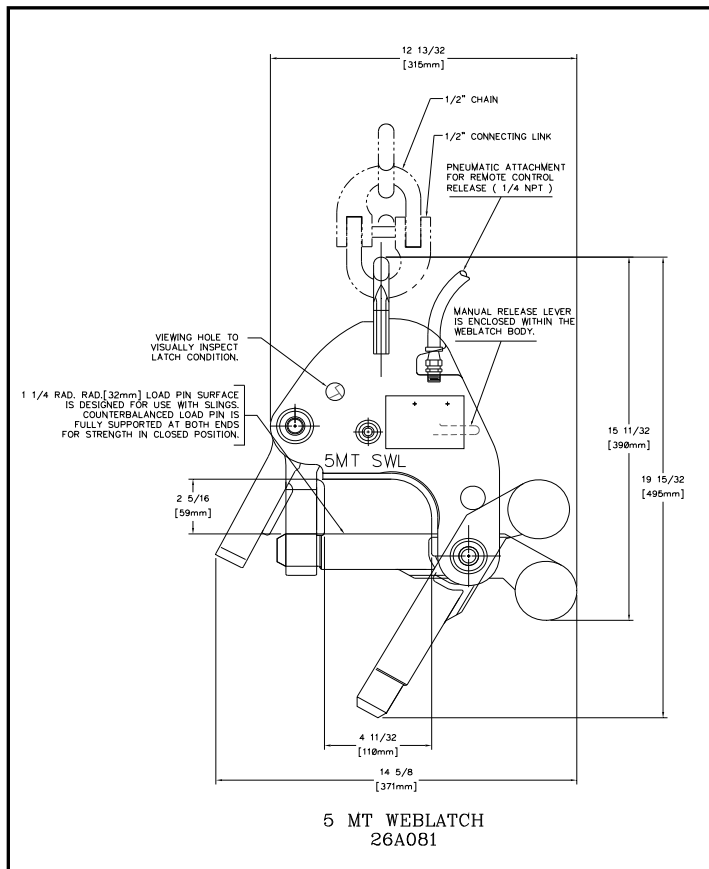

**Requirements:**

- Pneumatic: 0.5 cubic inch (.008 liter) @20 PSI (1.42 BAR) free air / cycle.

**Specifications:**

- Size: 15 11/32" (390mm) height x 12 13/32 (315mm) wide x 2 5/16" (75mm) thick.
- Weight: 30.0 lbs (13.6 kg)
- Throat width: 4 5/16" (110mm)
- Throat height: 2 5/16 (59mm)
- Safe working load: 11025 lbs (5 mt)
- Safety factor: 4 :1
- Finish: Sand blast preparation.  
1 coat Primer.  
2 coat yellow and orange

**Contact Cranston Machinery for a free copy of:**

- Cranston's "Guidelines for cargo lifting with Cranston's WEB-LATCH", specification #CS006"
- Cranston's "WEB-LATCH operating instructions", Bulletin #L028.

**Alternate models**



UNI-HOOK  
3MT Swivel Cap  
Model 26A087



WEB-LATCH  
10MT  
Model 26A083



UNI-LIFT  
2MT  
Model 26A069



Upgrade kits or Complete Custom  
Designed Lifting Frames.



**FOR FURTHER DETAILS CONTACT:**

**Cranston Machinery Co., Inc.**

2251 SE Oak Grove Blvd., Oak Grove, OR. 97267

Phone: 503-654-7751 Fax: 503-654-6172

[www.cranston-machinery.com](http://www.cranston-machinery.com)

All products and services are covered by Cranston standard terms and conditions, including Limits of liability and warrantee effective at the time of sale. Available upon request.

**Brochure # L025 090702**